

Number E 2085



CERTIFICATE

GASTEC Certification B.V., hereby declares
that the **pressure regulator**, series

HUPF...B

marketed by **Honeywell UGV S.r.l.**

in **Rivoli (To), Italy**

complies with the **essential requirements** of the
Gas Appliances Directive (90/396/EEC).

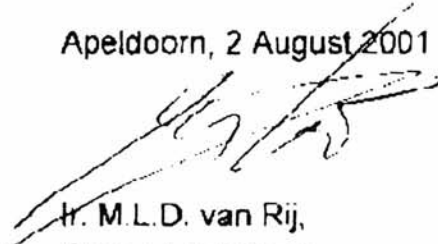
The compliance is based on examination to:
EN 88, 1991

PIN : 0063AR4719
Report number : see appendix to certificate

The products have been approved for all EU and EFTA
countries.

A description of the specific types is given in the appendices
to this certificate.

Apeldoorn, 2 August 2001


H. M.L.D. van Rij,
General manager.

GASTEC

GASTEC Certification B.V.
P.O. Box 137
7000 AC Apeldoorn
The Netherlands
Willemstraat 50
7027 AC Apeldoorn



EC TYPE-EXAMINATION CERTIFICATE: E 2085

Appendix no.: 1

Dated: 12 June 2002


P.I.N.: 0063AR4719

Examination report(s):

121399 dated 12-06-2002

List of all available types

HUPF...B	Gas governor with built-in filter approved on EN 88. Governor class A. Mechanical strength group 2. Ambient temperature range -15 °C to 60 °C Inlet pressure (maximum) 1000 mbar Min. dP 2.5mbar Outlet pressure ranges: 5-13mbar (green spring) 7-20mbar (red spring) 10-30mbar (white spring) 25-55mbar (yellow spring) 30-70mbar (blue spring) 60-100mbar (black spring)
HUPF015B150	connection Rp1/2
HUPF020B150	connection Rp3/4
HUPF025B150	connection Rp1
HUPF032B150	connection Rp1 1/4
HUPF040B150	connection Rp1 1/2
HUPF050B150	connection Rp2
HUPF065B350	flanged connection DN65
HUPF080B350	flanged connection DN80
HUPF100B350	flanged connection DN100
HUP...B	Gas governor as described above without filter
HUP015B150	connection Rp1/2
HUP020B150	connection Rp3/4
HUP025B150	connection Rp1
HUP032B150	connection Rp1 1/4
HUP040B150	connection Rp1 1/2
HUP050B150	connection Rp2
HUP040B350	flanged connection DN40
HUP050B350	flanged connection DN50
HUP065B350	flanged connection DN65
HUP080B350	flanged connection DN80
HUP100B350	flanged connection DN100

	IDENTIFICATION SHEETS	
Report Number: 120782	Governors	Page: IS 1/00

Information for all Notified Bodies

Information on the EC type-examination certificate, issued by
 GASTEC NV, P.O. BOX 137, 7300 AC Apeldoorn, The Netherlands

File no : 0063/E2085/161719 dated 15-12-1996
 Updated : 0063/E2085/119912 dated 01-11-1997
 : 0063/E2085/120022 dated 01-08-1998
 : 0063/E2085/120330 dated 15-06-1999
 : 0063/E2085/120782 dated 27-02-2001
 : 0063/E2085/121399 dated 12-06-2002

PIN : 0063AR4719

Type of product : Governors, model 30...

Manufacturer : FAG di Alfredo Giuliani & C. S.n.c
 Address : Via Piemonte 15
 40064 Ozzano dell'Emilia (Bologna)
 Italy

Commercial designation : Pressure governors, 300..., 301..., and 311.. series


Marketed by : Honeywell UGV S.r.l.
 : Via Ferrero 16
 10090 Cascine Vica, Rivoli (To)
 Italy

Commercial designation marketer : HUPF...B series (311 models only)
 HUP...B series (301 models only)

Base of examination : EN 88 dated June 1991

Countries in which the product will be marketed : All CE countries

Comments

	IDENTIFICATION SHEETS	
Report Number: 120762	Governors	Page: IS 2/00

Information for all Notified Bodies


Information on the EC type-examination certificate, issued by
GASTEC NV, P.O. BOX 137, 7300 AC Apeldoorn, The Netherlands

File no. . 0063/E2085/121399 dated 12-06-2002

List of all available types

- 300.. Gas governor approved on EN 88
Governor class A.
Mechanical strength: group 2.
Ambient temperature range -15 °C to 60 °C
Inlet pressure (maximum) 1000 mBar
Min. dP 2.5mbar
Outlet pressure ranges: 5-13mbar (green spring)
7-20mbar (red spring)
10-30mbar (white spring)
25-55mbar (yellow spring)
30-70mbar (blue spring)
60-100mbar (black spring)
- 30051 connection Rp1/2
30052 connection Rp3/4
30053 connection Rp1
- 301.. Gas governor approved on EN 88.
Governor class A.
Mechanical strength group 2.
Ambient temperature range -15 °C to 60 °C
Inlet pressure (maximum) 1000 mBar
Min. dP 2.5mbar
Outlet pressure ranges: 5-13mbar (green spring)
7-20mbar (red spring)
10-30mbar (white spring)
25-55mbar (yellow spring)
30-70mbar (blue spring)
60-100mbar (black spring)
- 30150 connection Rp1/2
30151 connection Rp3/4
30152 connection Rp1
30153 connection Rp1 1/4
30154 connection Rp1 1/2
30155 connection Rp2
- 30154/F flanged connection DN40
30155/F flanged connection DN50
30158/F flanged connection DN65
30157/F flanged connection DN80
30158/F flanged connection DN100

Job number: 121399	Initials:
--------------------	-----------

	IDENTIFICATION SHEETS	
Report Number: 120782	Governors	Page: IS 3/00

(Information for Notified Bodies)

File no. : 0063/E2085/121399 dated 12-06-2002

311.. Gas governor with built-in filter approved on EN 88.
Governor class A.
Mechanical strength group 2.
Ambient temperature range -15 °C to 60 °C
Inlet pressure (maximum) 1000 mBar
Min. dP 2.5mbar
Outlet pressure ranges: 5-13mbar (green spring)
7-20mbar (red spring)
10-30mbar (white spring)
25-55mbar (yellow spring)
30-70mbar (blue spring)
60-100mbar (black spring)

31150 connection Rp1/2
31151 connection Rp3/4
31152 connection Rp1
31153 connection Rp1 1/4
31154 connection Rp1 1/2
31155 connection Rp2
31156/F flanged connection DN65
31157/F flanged connection DN80
31158/F flanged connection DN100

Job number 121399		Initials :
-------------------	--	------------