

		DolceClima Super 9 HE Cod. 00522	
		Single duct	Double duct
Cooling capacity*	kW	*2,43	**1,95
Dehumidification capacity	l/h	0,95	0,88
Power absorption	W	*930	**870
Air volume	m ³ /h	350	350
Fan speeds	—	2	2
Power supply	V/Hz	230/50	230/50
Dimensions (l x h x p)	mm	470 x 855 x 485	470 x 855 x 485
Hose length	m	1,4	1,4
Fuse	A	10	10
Weight	kg	35	35
Electrical heating (optional)	W	1.750	1.750
E.E.R.	—	2,61	2,24
Energy Efficiency Class	—	A	C

* measured to pr EN 14511 standard - **measured to pr EN 814 standard.

THE PORTABLE OR FIXED AIR CONDITIONER

THE -CLASS A- AIR CONDITIONER




DOUBLE DUCT
EFFECTIVE OUTPUT + 75%
In this version, Dolceclima S9 has a 75% better output than single duct use (under same testing conditions), thanks to its twin hose patented system. A special air conveyor turns the two hoses into a single piece, thus simplifying double duct use.

SINGLE DUCT
CLASS A
In this, basic version, the condensate hose is simply put through a window. This version of Dolceclima S9 is in Energy Efficiency **Class A**.




Design: King & Miranda

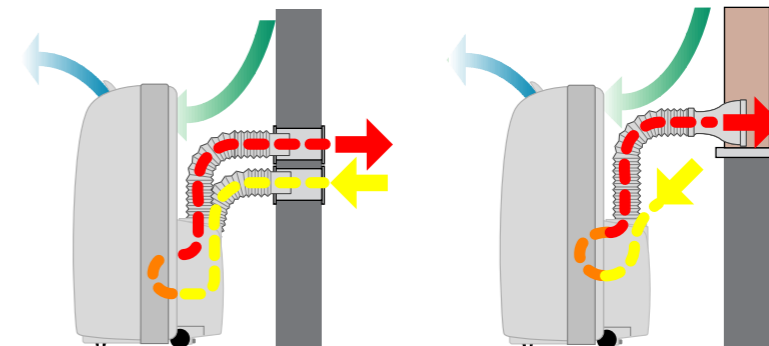

COMFORT
Dolceclima S9 is a portable aircon usable in both single and double duct versions.

FIXED USE
You might decide to install Dolceclima S9 as a fixed unit. Just drill two holes in the wall and use the special installation kit included as a standard.

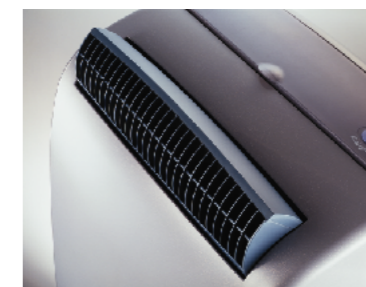

FURTHERMORE

- Automatic evacuation of condensate water
- Adjustable air grid
- Electronic hour setting
- Electronic temperature setting
- Electronic fan speed setting
- Dehumidification function
- Electrical heater (optional)
- Electronic protection device for compressor
- Comfort functions (smile and moon)
- Refrigerant: R410 A ecological gas